

COMPLETE RANGE Livestock trailers



Discover our
series
7900



Experience it for yourself

Our rationale makes it easy for you to become a staunch follower of Humbaaur's high-quality products.



Follow HUMBAUR!

„Because HUMBAUR is really good at it“

35 years of experience

We have been one of the leading manufacturers of car trailers for over 35 years. Over 1,000,000 trailers have left our premises since our company was founded. Nowadays, we produce around 60,000 units per year. And our wealth of experience is reflected in each of our trailers.

High quality

Robust and long-lasting — that's what a trailer needs to be. We use outstanding components and first-rate workmanship to achieve this goal. Before we deliver each trailer, we put it through its paces.

A wide range of transportation solutions

Our offering covers a very wide range of uses. Whether you are looking for a trailer for private or commercial needs, we can provide you with the appropriate model. You can choose a maximum gross weight between 750 kg and 55 t.

Wide range of accessories

Do you have very specific demands when it comes to your trailer? Thanks to a number of matching accessories, you can add to the comprehensive standard features to meet your requirements.

Committed customer service

If your trailer has a gross weight of up to 3.5 t, your dealer near you will be happy to help. Owners of trailers with a gross weight of 5 t or above can use our direct service. Whether you need a spare part or have a question about how to use your trailer – we and your local dealer, will be happy to help.

High-quality components

Quality is reflected in the detail — that's why Humbaaur only uses high-quality vehicle components produced by reputable manufacturers. We continuously share our experiences with our suppliers. This enables us to continuously improve our products.

Keep the overview

TABLE OF CONTENTS

Experience iti for yourself	2
Exactly what livestock breeders and farmers need	4
Tandem-axle Plywood	
HTV 203217 HS	6
Single-axle - and tandem-axle Aluminium	
HEV 152513	8
HTV 203217 AS	10
HTV 243016 AG	12
Optional accessories.....	14
Strengthened by experience.....	16



THE SERIES 7900

Exactly what livestock breeders and farmers need

Tandem-axle Plywood

HTV 203217 HS

Structure made of high-quality, plastic-coated and UV-resistant side walls in black. The sturdy longitudinal beam chassis and the associated optimum stability stability, a very good road holding with high driving safety and smooth driving behaviour is achieved. The weather-resistant plywood floor is glued several times to be waterproof and has an anti-slip effect. The gas-spring-supported tailgate is covered with a rubber granulate mat to ensure safe to ensure safe access to the trailer. The trailers are each equipped with a robust tarpaulin and bows



Single-axle Aluminium

HEV 152513

The new manoeuvrable single-axle livestock trailer stands out due to its robust construction made of double-walled anodised aluminium profiles, which are attached to a solid outer frame made of hot-dip galvanised steel. Its chassis offers a high degree of stability and thus the best possible safety thanks to its hot-dip galvanised chassis. The glued and sealed rubber floor ensures a safe stand while driving. A large access door is located on the left side of the trailer. The trailer is equipped with a robust tarpaulin and bows





Tandem-axle Aluminium

HTV 203217 AS

Our tandem livestock trailers with aluminium bodies are designed for tough use over many years. The continuous corrosion protection makes them particularly durable. The chassis is hot-dip galvanised, the side supports and the outer frame are made of hot-dip galvanised steel sheets. The hot-dip galvanised chassis provides a high degree of stability and therefore best safety. All enclosures and side walls are made of high-quality anodised aluminium profiles. The weatherproof plywood floor, which is glued several times to be waterproof and anti-slip, ensures a secure footing while driving. Access to the door on the side wall provides easy access to the interior at any time. The trailers are equipped with a robust tarpaulin and bows.



TANDEM-AXLE WOOD

HTV 203217 HS

TECHNICAL DATA

Overall dimensions	4650 x 2200 x 2760 mm
Internal dimensions	3220 x 1700 x 1850 mm
Permissible gross weight	2000 kg
Load capacity	1329 kg
Load height	460 mm
Tyres	13"


Accessories (optional)

- Rear door can be turned and swivelled
- Rubber floor glued in and sealed
- Tailgate with rubber step instead of granulate mat
- Ventilation flap per piece (approx. 800 x 250 mm)
- Front exit in driving direction right additionally
- Front exit in driving direction left instead of entrance door
- Floor covered with aluminium chequer plate
- Floor with flowing screed
- AluBiComp floor instead of wooden floor with 8 mm rubber floor
- Chest bar 3 x longitudinally adjustable
- Rear bar 3 x longitudinally adjustable
- Drift fence on both sides of the ramp flap
- Crosswise adjustable and swivelling partition grid
- Tarpaulin and bows 500 mm high instead of 350 mm (extra charge)
- Flat tarpaulin, colour white instead of P+S 350 mm high (reduced price)






Interior view of the sliding ventilator for a pleasant room climate (optional)



Hot-dip galvanised Hinge profile



Tarpaulin can be fixed with two tarpaulin on the front wall (Special accessories on request!)



Important Details

- 1 **Side member chassis** bolted, **hot-dip galvanised**
- 2 **Side walls** made of high-quality, **plastic-coated and UV-resistant drop sides**, 18 mm thick
- 3 13-pin plug and reversing light
- 4 **Wooden floor panel**, 21 mm thick
- 5 Solid, all-round and **hot-dip galvanised frame profile**
- 6 **Overrun flap** with gas spring support and Rubber granulate mat
- 7 2 piece **tie rings**
- 8 **Entry door** on the left in the direction of travel
- 9 **Handle** for manoeuvring
- 10 Jockey wheel
- 11 Tyres suitable for 100 km/h
- 12 **Tarpaulin and bows**, 350 mm high, colour white with **viewing window at the front** left and right

SINGLE-AXLE ALUMINIUM

HEV 152513

TECHNICAL DATA

HEV 152513 ALU

Overall dimensions	3760 x 1812 x 2276 mm
Internal dimensions	2515 x 1305 x 1650 mm
Permissible gross weight	1500 kg
Load capacity	1000 kg
Load height	564 mm
Tyres	14"





Important details

- 1 Side member chassis bolted, hot-dip galvanised
- 2 Side walls made of high-quality anodised Aluminium side walls, 18 mm thick
- 3 13-pin plug and reversing light
- 4 Aluminium floor, 18 mm with rubber floor 8 mm strongly glued and sealed
- 5 Solid, all-round and hot-dip galvanised frame profile
- 6 Elegant, hot-dip galvanised rear outrigger with integrated lighting
- 7 Overrun flap with gas spring support and rubber granulate mat
- 8 2 piece tie rings
- 9 Entry door on the left in the direction of travel
- 10 Handles for manoeuvring
- 11 Jockey wheel
- 12 Tyres suitable for 100 km/h
- 13 Tarpaulin and bows, 300 mm high, colour white with viewing window at the front left and right



HTV



WELLRAISED
HUMBAUR
KEPTSAFELY



HUMBAUR

MAKES IT HAPPEN

TANDEM-AXLE ALUMINIUM

HTV 203217 AS


TECHNICAL DATA

Overall dimensions	4650 x 2200 x 2760 mm
Internal dimensions	3220 x 1700 x 1850 mm
Permissible gross weight	2000 kg
Load capacity	1324 kg
Load height	470 mm
Tyres	13"

Accessories (optional)

- Rear door can be turned and swivelled 450.00 535.50 III
- Rubber floor glued in and sealed
- Tailgate with rubber step instead of granulate mat
- Front exit in driving direction right additionally
- Front exit in driving direction left instead of entrance door
- Floor covered with aluminium chequer plate
- Floor with flowing screed
- AluBiComp floor instead of wooden floor with 8 mm rubber floor
- Ventilation flap each (approx. 800 x 250 mm)
- Chest bar 3 x longitudinally adjustable
- Rear bar 3 x longitudinally adjustable
- Crosswise adjustable and swivelling partition grille
- Driving fence on both sides of the ramp flap
- Tarpaulin and bows 500 mm high instead of 350 mm (surcharge)
- Flat tarpaulin, colour white instead of P+S 350 mm high (reduced price)




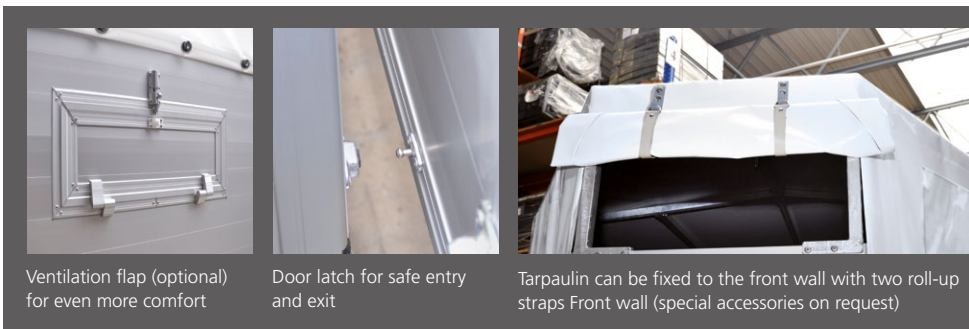

Ventilation flap (optional) for even more comfort

Door latch for safe entry and exit

Tarpaulin can be fixed to the front wall with two roll-up straps Front wall (special accessories on request)

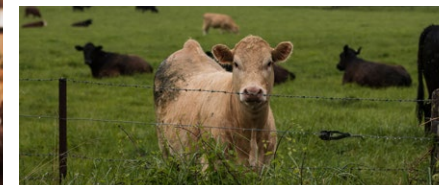

Important details

- 1 **Side member chassis bolted, hot-dip galvanised**
- 2 **Side walls made of high-quality anodised Aluminium side walls, 18 mm thick**
- 3 13-pin plug and reversing light
- 4 **Wooden floor, 21 mm thick**
- 5 Solid, all-round and **hot-dip galvanised frame profile**
- 6 Elegant, **hot-dip galvanised rear outrigger** with integrated lighting
- 7 **Overrun flap** with gas spring support and rubber granulate mat
- 8 2 piece **tie rings**
- 9 **Entry door** on the left in the direction of travel
- 10 **Handles** for manoeuvring
- 11 Jockey wheel
- 12 Tyres suitable for 100 km/h
- 13 **Tarpaulin and bows, 300 mm high, colour white with viewing window** at the front left and right

TANDEM-AXLE ALUMINIUM

HTV 243016 AG

TECHNICAL DATA

Overall dimensions	4590 x 2230 x 2480 mm
Internal dimensions	3125 x 1700 x 1880 mm
Permissible gross weight	2400 kg
Load capacity	1662 kg
Load height	470 mm
Tyres	14"

Accessories (optional)


- Chassis for 2.6t
- Rear door can be turned and swivelled
- Floor covered with aluminium chequer plate
- Floor with flowing screed
- Ventilation flap each (approx. 800 x 250 mm)
- Front exit in driving direction left additionally
- Front exit in driving direction on the right instead of access door
- Tailgate with rubber tread instead of granulate mat
- Rubber floor glued in and sealed
- AluBiComp floor instead of wooden floor incl. 8 mm rubber floor
- Drift fence on both sides of tailgate
- Crosswise adjustable and swivelling partition fence
- Breast bar 3 x longitudinally adjustable
- Rear bar 3 x longitudinally adjustable
- Tarpaulin and bows 500 mm high instead of 350 mm (extra charge)
- Flat tarpaulin, colour white instead of P+S 350 mm high (reduced price)






Important details

- 1 **Side member chassis** bolted, **hot-dip galvanised**
- 2 **Side walls** made of **high-quality anodised Aluminium side walls**, 18 mm thick
- 3 13-pin plug and reversing light
- 4 **Wooden floor**, 18 mm thick
- 5 Solid, all-round and **hot-dip galvanised frame profile**
- 6 **Overrun flap** with gas spring support and rubber granulate mat
- 7 3 piece **tie rings**
- 8 **Entry door** on the left in the direction of travel
- 9 **Handles** for manoeuvring
- 10 **Jockey wheel** fully automatic
- 11 Tyres suitable for 100 km/h
- 12 **Tarpaulin and bows**, 300 mm high, colour white with **viewing window** at the front left and right



White tarpaulin easy to operate with twist locks



Three massive tie rings in the front area



Optional partition grid, individually adjustable and swivelling



Our range of accessories


Aufbau



Drift fence on both sides on overrun flap



Chest bar / rear bar 3 x longitudinally adjustable (HTV 243016)

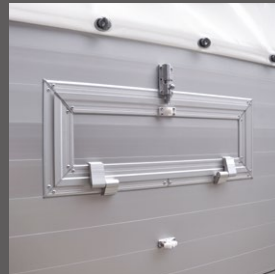

Side ventilation flap



Ventilation slider 410 x 100 mm



Front exit in driving direction, left / right additional



Tailgate with kick strip rubber (HTV 243016)



Crosswise partition grille adjustable and swivelling




Flowing screed floor




Rear door swivelling and swivelling (HTV 243016)


Theft protection



U-lock for braked trailers up to 3500 kg (with AL-KO AE)



Socket lock for unbraked trailers



Metal shut-off shoe with lock



Tailored to your requirements


Wheels



Spare wheel



Tyres 185 / 65 R14 instead of 13 inch

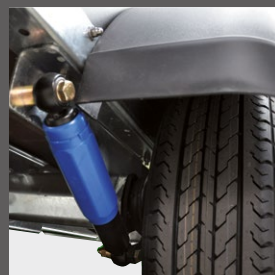

Wheel shock absorber incl. 100 km/h confirmation



Jockey wheel (version depending on model)



Spare wheel holder (loose)



Spare wheel holder mounted on drawbar (only possible with long drawbar possible)



Lighting/electrics



Adapter 7-13-pin



Interior light in Cattle trailer

In addition to **the extensive standard equipment** of our trailers and vehicle bodies, we offer **a wide range of accessories to suit every model**. This means you can put together the right solution for your transport needs entirely according to **your individual requirements** and also grow with the transport tasks.



Order spare parts – conveniently online

shop.humba.com


Strengthened by experience

Humbaur stands for innovation and customer-oriented solutions. This approach has enabled this owner-managed, medium-sized family business to become the **European market leader**. With around **420 different standard trailer models** from 750 kg to 55 tonnes for commercial and private clients and 230 models of the FlexBox vehicle bodies, it has the perfect solution to every transport problem. For over 35 years we have built a wealth of experience, together with our trading partners and customers that is reflected in each of our products – **in sophisticated functions and details, greater user-friendliness and a high level of driving comfort.**


Our trademarks include robust and low-maintenance vehicles with an extensive range of standard equipment, as well a wide range of accessories plus the ability to offer customised solutions. Our own manufacturing expertise – ranging from small metal parts to polyester roofs or sandwich panels – combined with quality components from renowned manufacturers, ensures **durable products which retain their value well.**



Ulrich Humbaur
Proprietor, Director

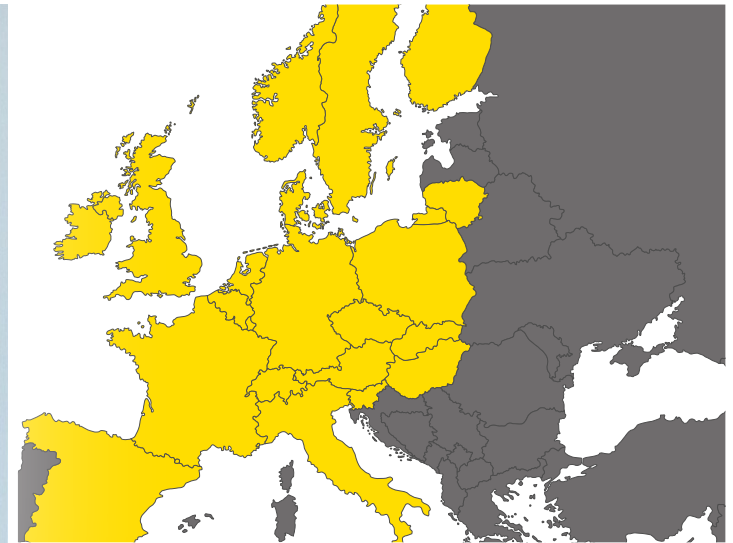

Together with our **partner network**, we provide comprehensive local support for all your transport problems. Together, we will find the right solution for your transport requirements and will take care of **servicing and repairs**. Our service includes reasonably priced repair options, as well as the **long-term availability of spare parts** so that you can enjoy and use your trailer or vehicle body for years to come.

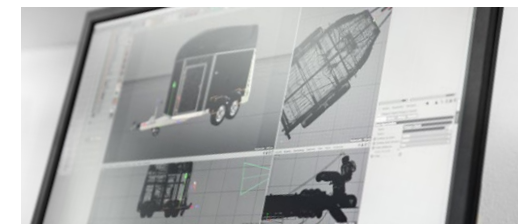

Outstanding quality

We place great importance on the fact that our products operate even under **tough conditions** with no nasty surprises. We construct our trailers in robust designs using suitable materials of the required strength. We simulate the hardest conceivable use for our trailers on various test tracks. We check the stability and durability of the chassis, frame and components at full load. This is how we ensure the **outstanding quality** of our trailers.



Our **quality management system** is certified to **DIN EN ISO 9001:2015** and **KBA-ZM-A** and is regularly reviewed. We are also certified by numerous commercial vehicle manufacturers as a construction and reconstruction partner for the vehicle body segment. We regularly demonstrate **our quality** through recurring checks and through our products themselves.



As a customer, you benefit from this twice:
during use and when it comes to reselling.





Also on online and much more at
humbaur.com/en/downloads

Do you have any questions about this or any other pendant
in our range or would you like personal advice?

We look forward to hearing from you.

By telephone on **0821 / 24 929 - 0** or
by e-mail to info@humbaur.com

YOUR HUMBAUR DEALER NEAR YOU:

